
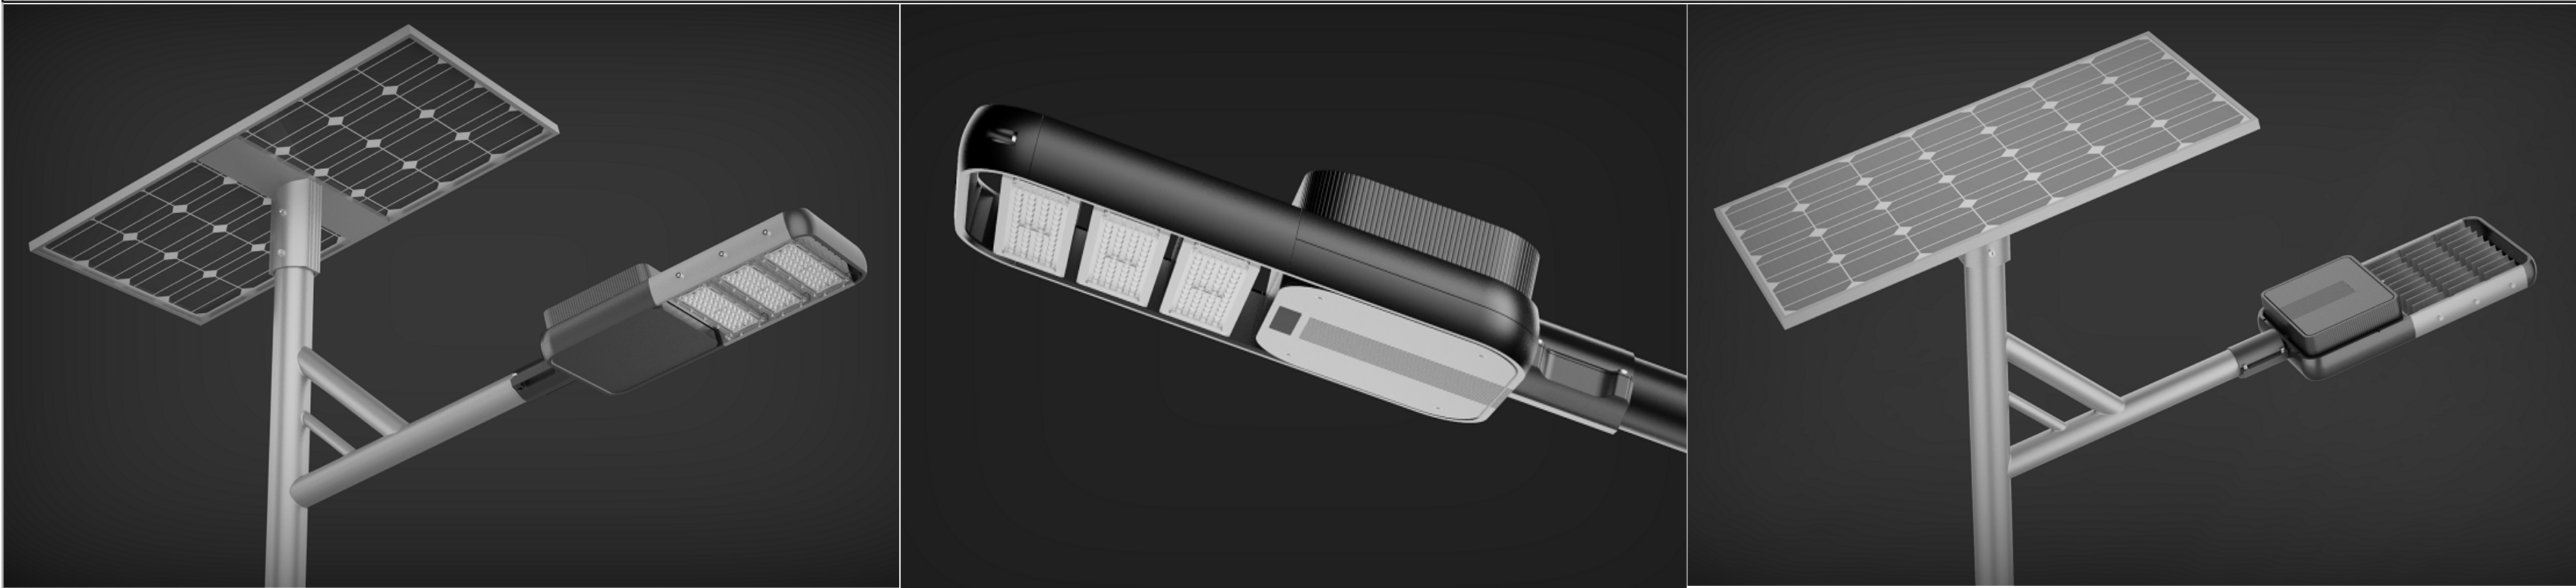
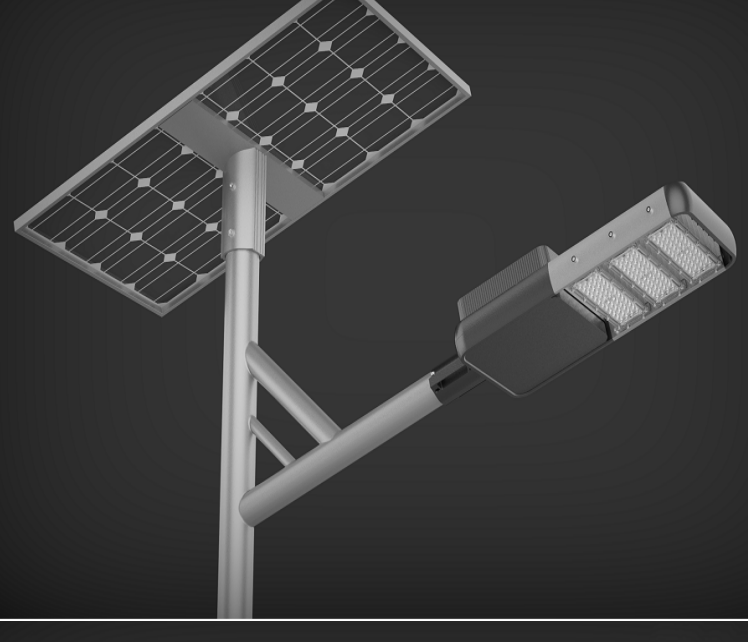
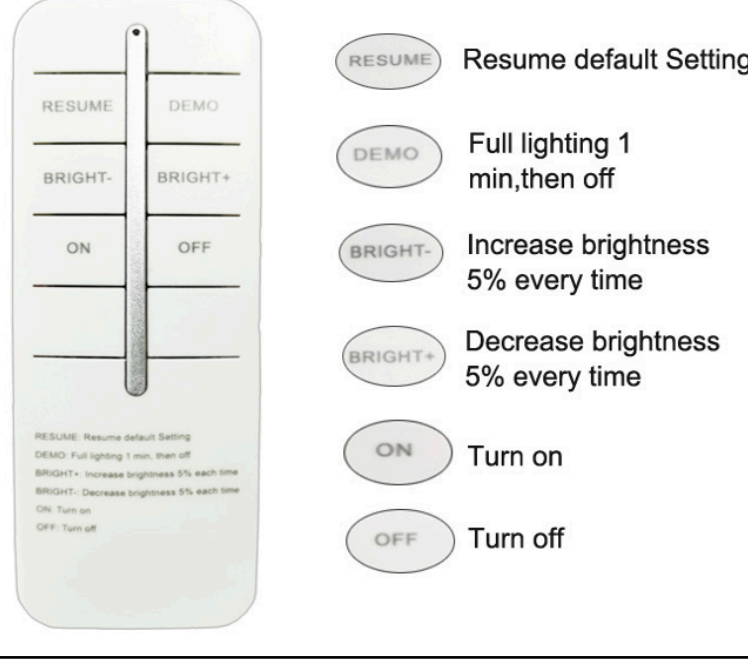
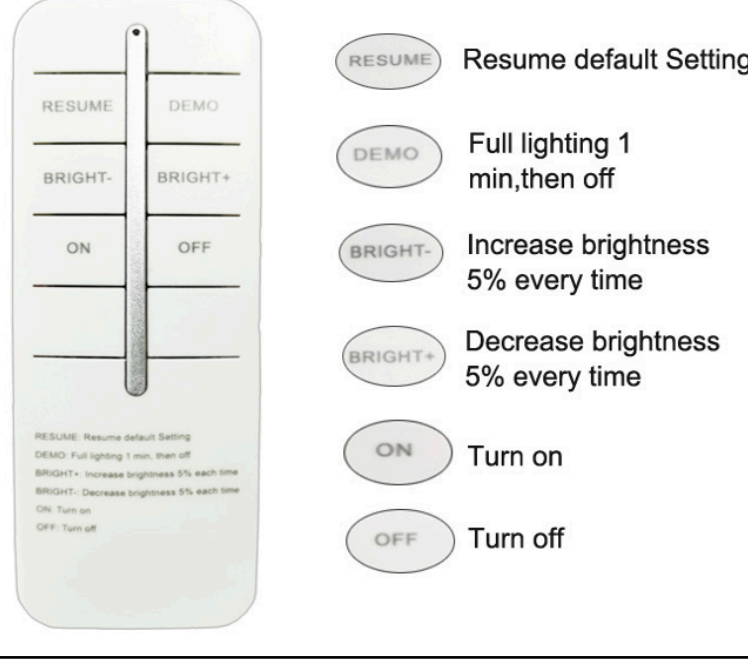
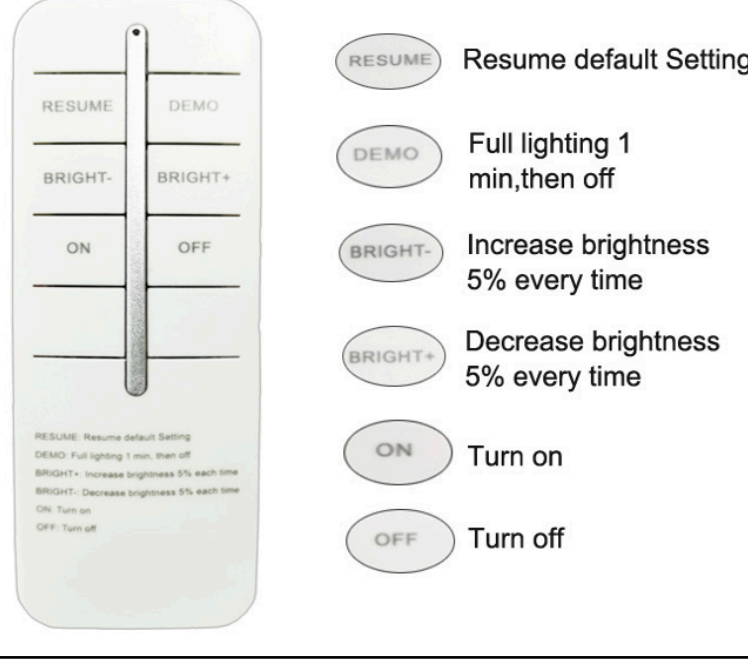
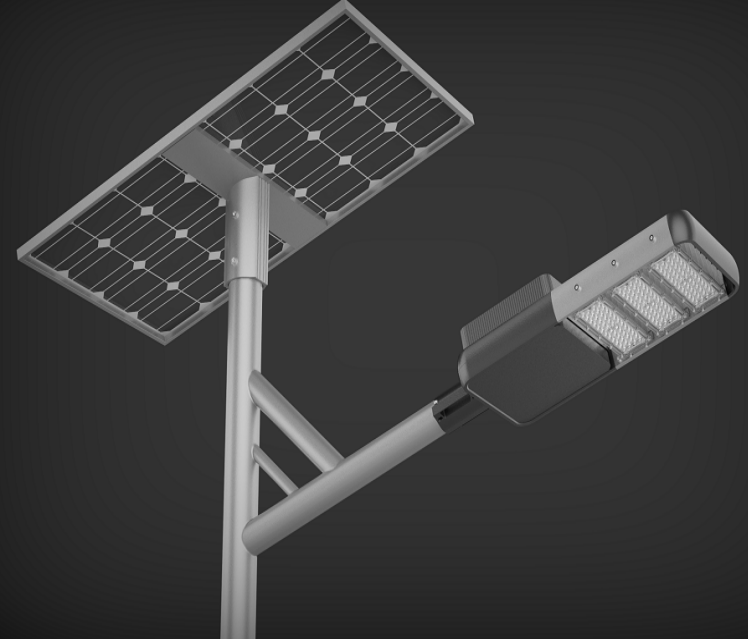
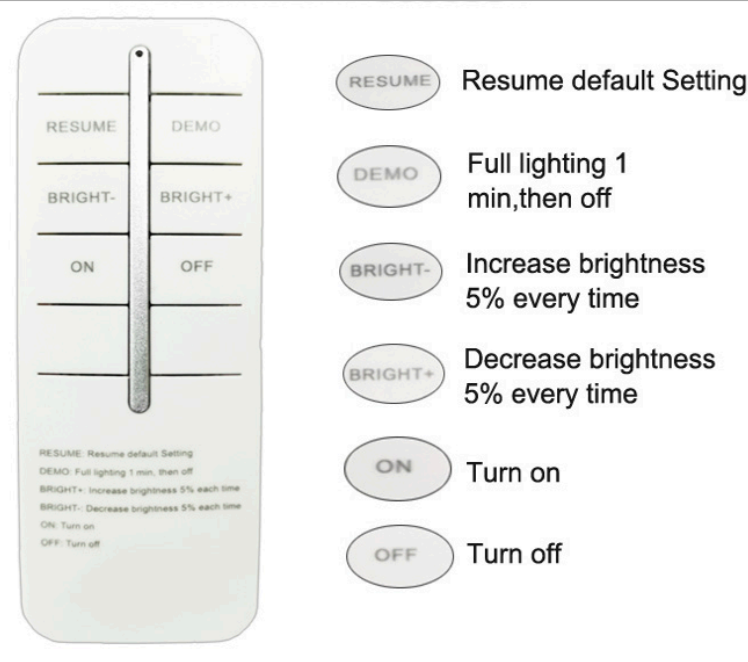
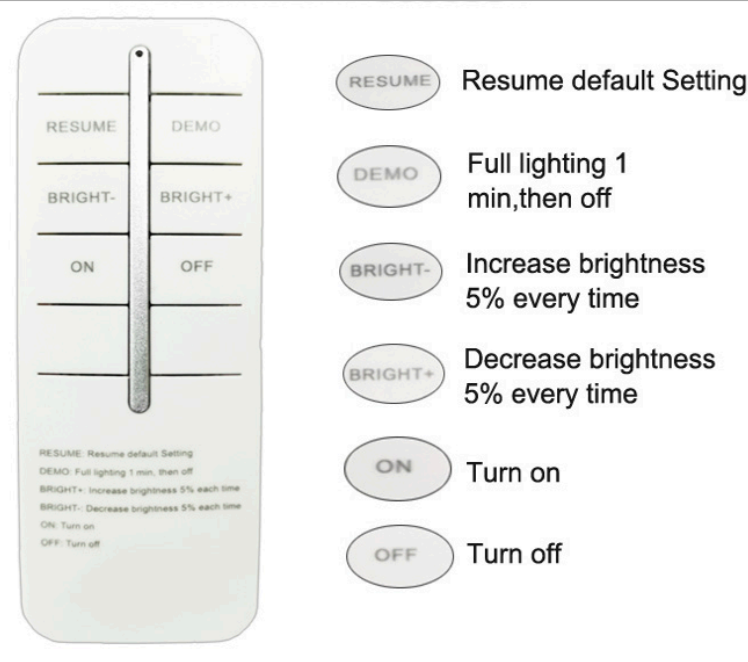
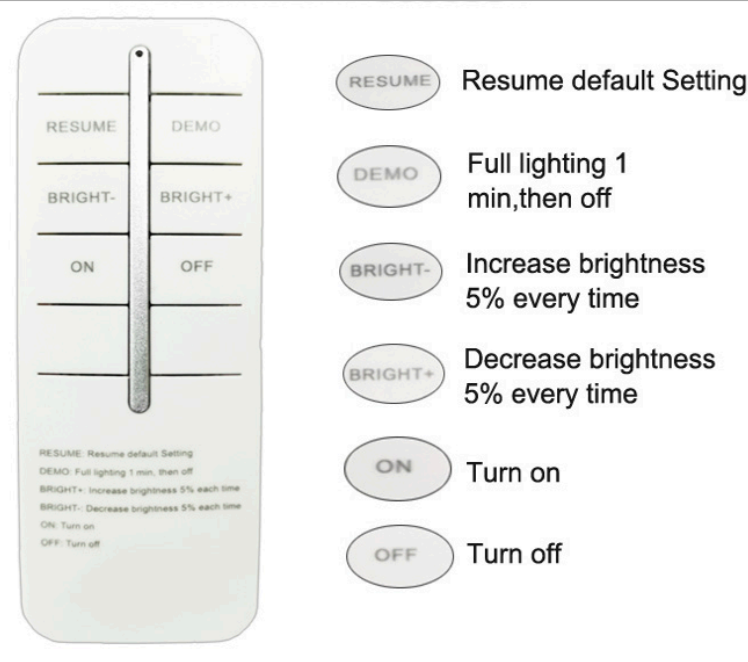
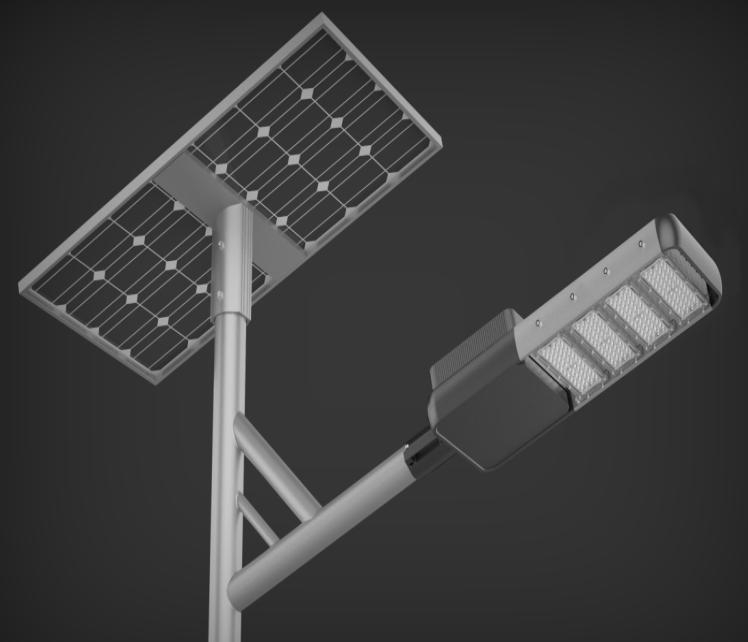
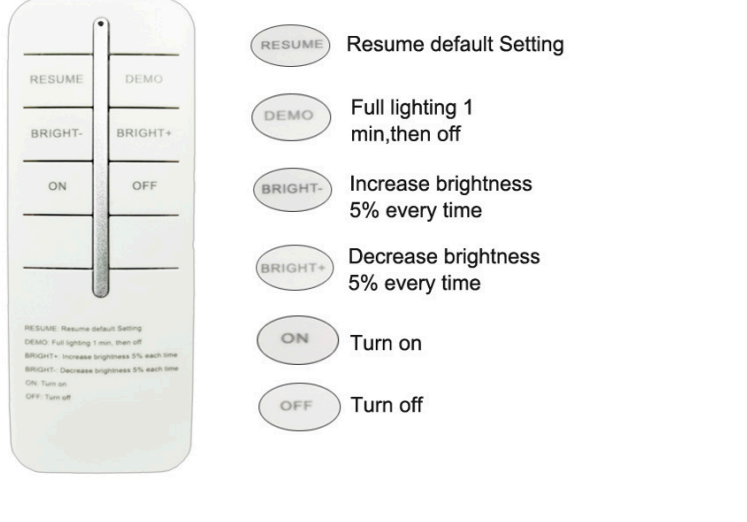
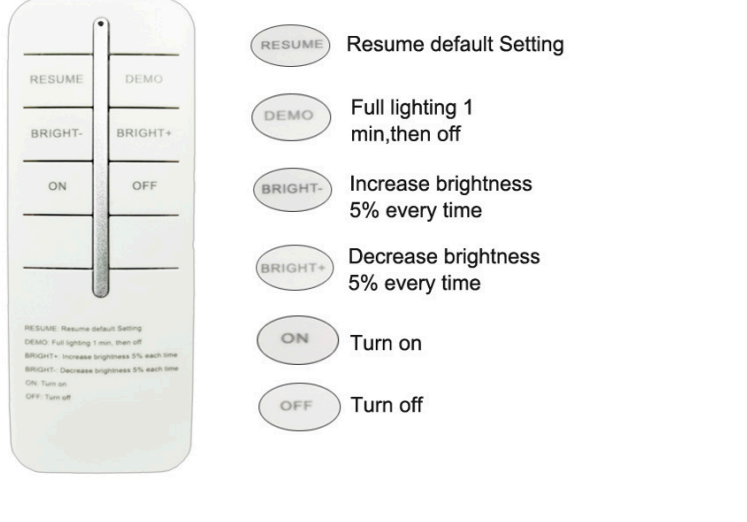


# JIANGSU SHIXIN LANDSCAPE LIGHTING CO.,LTD



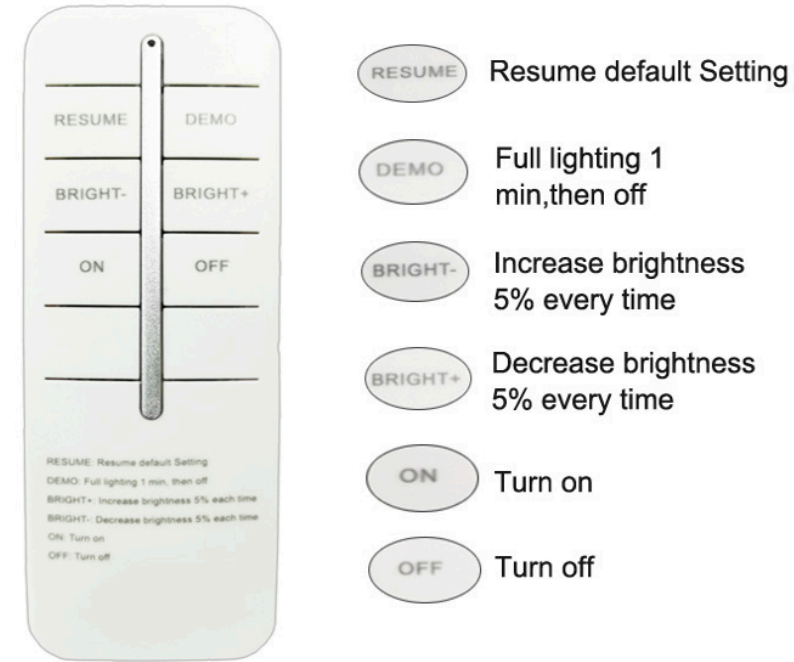
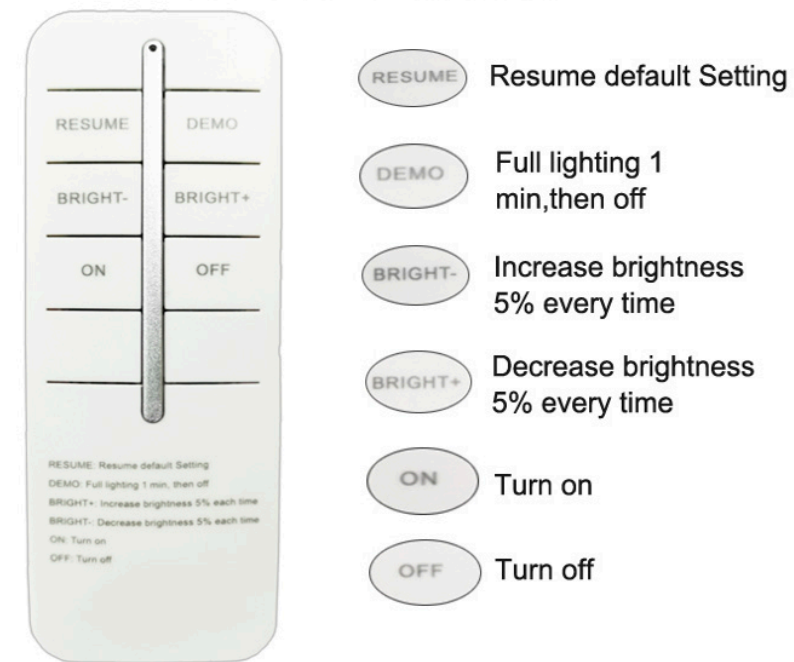


Type	Pictures	Specification	Unit Price (USD)																																							
SX-ZC-30W		Feature: 1. Whole lamp adopt high-end aluminum alloy material. 2. LED module adjustable angle, suitable for different terrain roads. 3. Super-big battery box, the battery inside led lamp. 4. View angle is 140°, lighting more area. 5. Very easy install, maintenance, disassembly takes only three minutes, auto on/off. 6. With remote control, use UAV technology, can penetrate walls, remote control distance up to 30 meters.	<b>EXW</b>	<b>87.6</b>																																						
		<table border="1"> <tr> <th>LED</th> <th>Bridgelux chips3030 (Life time 100000hours)</th> <th>Lighting Mode</th> </tr> <tr> <td>Lumen(LM)</td> <td>150LM/W</td> <td>3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness</td> </tr> <tr> <td>Colour Temperature</td> <td>6000K ~6500K (it can be customized)</td> <td rowspan="10"> </td> </tr> <tr> <td>LifePO4 Battery</td> <td>18AH 12.8V</td> </tr> <tr> <td>Solar Panel</td> <td>18V40W Imported High Efficiency Monocrystalline Silicon</td> </tr> <tr> <td>Install Pole diameter</td> <td>60-65mm</td> </tr> <tr> <td>Mounting Height</td> <td>4~6m (Suggest install between space10-20m)</td> </tr> <tr> <td>Solar Charging Time</td> <td>5-6 hours by bright sunlight</td> </tr> <tr> <td>Cloudy/Rainy days</td> <td>5-7Cloudy/Rainy days</td> </tr> <tr> <td>Material</td> <td>High Class Aluminum</td> </tr> <tr> <td>Product Size</td> <td>575*280*100mm</td> </tr> <tr> <td>LED Lamp</td> <td>96PCS</td> </tr> <tr> <td>Motion sensor</td> <td>No (customize is available)</td> <td> <b>Packing:</b>  <b>LED Lamp Packing Size:605*300*115MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:4.6KG</b>  <b>Solar Panel Packing Size: 610*580*80MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:5.2KG</b>  <b>Packs Containers:</b>  <b>20GP:570Sets</b>  <b>40GP:1160Sets</b>  <b>40HP:1390Sets</b> </td> </tr> <tr> <td>Remote Control</td> <td>Yes (1pc remote control per lot)</td> </tr> <tr> <td>Waterproof</td> <td>IP65</td> </tr> <tr> <td>Working Temperature</td> <td>-25°C to 65°C</td> </tr> <tr> <td>Certificates</td> <td>CE、ROHS、IP65</td> </tr> <tr> <td>Warranty</td> <td>3Years</td> </tr> </table>			LED	Bridgelux chips3030 (Life time 100000hours)	Lighting Mode	Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness	Colour Temperature	6000K ~6500K (it can be customized)		LifePO4 Battery	18AH 12.8V	Solar Panel	18V40W Imported High Efficiency Monocrystalline Silicon	Install Pole diameter	60-65mm	Mounting Height	4~6m (Suggest install between space10-20m)	Solar Charging Time	5-6 hours by bright sunlight	Cloudy/Rainy days	5-7Cloudy/Rainy days	Material	High Class Aluminum	Product Size	575*280*100mm	LED Lamp	96PCS	Motion sensor	No (customize is available)	<b>Packing:</b> <b>LED Lamp Packing Size:605*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:4.6KG</b> <b>Solar Panel Packing Size: 610*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:5.2KG</b> <b>Packs Containers:</b> <b>20GP:570Sets</b> <b>40GP:1160Sets</b> <b>40HP:1390Sets</b>	Remote Control	Yes (1pc remote control per lot)	Waterproof	IP65	Working Temperature	-25°C to 65°C	Certificates	CE、ROHS、IP65
		LED	Bridgelux chips3030 (Life time 100000hours)	Lighting Mode																																						
		Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness																																						
		Colour Temperature	6000K ~6500K (it can be customized)																																							
		LifePO4 Battery	18AH 12.8V																																							
		Solar Panel	18V40W Imported High Efficiency Monocrystalline Silicon																																							
		Install Pole diameter	60-65mm																																							
		Mounting Height	4~6m (Suggest install between space10-20m)																																							
		Solar Charging Time	5-6 hours by bright sunlight																																							
		Cloudy/Rainy days	5-7Cloudy/Rainy days																																							
		Material	High Class Aluminum																																							
Product Size	575*280*100mm																																									
LED Lamp	96PCS																																									
Motion sensor	No (customize is available)	<b>Packing:</b> <b>LED Lamp Packing Size:605*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:4.6KG</b> <b>Solar Panel Packing Size: 610*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:5.2KG</b> <b>Packs Containers:</b> <b>20GP:570Sets</b> <b>40GP:1160Sets</b> <b>40HP:1390Sets</b>																																								
Remote Control	Yes (1pc remote control per lot)																																									
Waterproof	IP65																																									
Working Temperature	-25°C to 65°C																																									
Certificates	CE、ROHS、IP65																																									
Warranty	3Years																																									
SX-ZC-40W		Feature: 1. Whole lamp adopt high-end aluminum alloy material. 2. LED module adjustable angle, suitable for different terrain roads. 3. Super-big battery box, the battery inside led lamp. 4. View angle is 140°, lighting more area. 5. Very easy install, maintenance, disassembly takes only three minutes, auto on/off. 6. With remote control, use UAV technology, can penetrate walls, remote control distance up to 30 meters.	<b>EXW</b>	<b>102.3</b>																																						
		<table border="1"> <tr> <th>LED</th> <th>Bridgelux chips3030 (Life time 100000hours)</th> <th>Lighting Mode</th> </tr> <tr> <td>Lumen(LM)</td> <td>150LM/W</td> <td>3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness</td> </tr> <tr> <td>Colour Temperature</td> <td>6000K ~6500K (it can be customized)</td> <td rowspan="10"> </td> </tr> <tr> <td>LifePO4 Battery</td> <td>24AH 12.8V</td> </tr> <tr> <td>Solar Panel</td> <td>18V50W Imported High Efficiency Monocrystalline Silicon</td> </tr> <tr> <td>Install Pole diameter</td> <td>60-65mm</td> </tr> <tr> <td>Mounting Height</td> <td>5~7m (Suggest install between space15-25m)</td> </tr> <tr> <td>Solar Charging Time</td> <td>5-6 hours by bright sunlight</td> </tr> <tr> <td>Cloudy/Rainy days</td> <td>5-7Cloudy/Rainy days</td> </tr> <tr> <td>Material</td> <td>High Class Aluminum</td> </tr> <tr> <td>Product Size</td> <td>575*280*100mm</td> </tr> <tr> <td>LED Lamp</td> <td>96PCS</td> </tr> <tr> <td>Motion sensor</td> <td>No (customize is available)</td> <td> <b>Packing:</b>  <b>LED Lamp Packing Size:605*300*115MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:5.2KG</b>  <b>Solar Panel Packing Size: 750*580*80MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:6.3KG</b>  <b>Packs Containers:</b>  <b>20GP:510Sets</b>  <b>40GP:1035Sets</b>  <b>40HP:1235Sets</b> </td> </tr> <tr> <td>Remote Control</td> <td>Yes (1pc remote control per lot)</td> </tr> <tr> <td>Waterproof</td> <td>IP65</td> </tr> <tr> <td>Working Temperature</td> <td>-25°C to 65°C</td> </tr> <tr> <td>Certificates</td> <td>CE、ROHS、IP65</td> </tr> <tr> <td>Warranty</td> <td>3Years</td> </tr> </table>			LED	Bridgelux chips3030 (Life time 100000hours)	Lighting Mode	Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness	Colour Temperature	6000K ~6500K (it can be customized)		LifePO4 Battery	24AH 12.8V	Solar Panel	18V50W Imported High Efficiency Monocrystalline Silicon	Install Pole diameter	60-65mm	Mounting Height	5~7m (Suggest install between space15-25m)	Solar Charging Time	5-6 hours by bright sunlight	Cloudy/Rainy days	5-7Cloudy/Rainy days	Material	High Class Aluminum	Product Size	575*280*100mm	LED Lamp	96PCS	Motion sensor	No (customize is available)	<b>Packing:</b> <b>LED Lamp Packing Size:605*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:5.2KG</b> <b>Solar Panel Packing Size: 750*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:6.3KG</b> <b>Packs Containers:</b> <b>20GP:510Sets</b> <b>40GP:1035Sets</b> <b>40HP:1235Sets</b>	Remote Control	Yes (1pc remote control per lot)	Waterproof	IP65	Working Temperature	-25°C to 65°C	Certificates	CE、ROHS、IP65
		LED	Bridgelux chips3030 (Life time 100000hours)	Lighting Mode																																						
		Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness																																						
		Colour Temperature	6000K ~6500K (it can be customized)																																							
		LifePO4 Battery	24AH 12.8V																																							
		Solar Panel	18V50W Imported High Efficiency Monocrystalline Silicon																																							
		Install Pole diameter	60-65mm																																							
		Mounting Height	5~7m (Suggest install between space15-25m)																																							
		Solar Charging Time	5-6 hours by bright sunlight																																							
		Cloudy/Rainy days	5-7Cloudy/Rainy days																																							
		Material	High Class Aluminum																																							
Product Size	575*280*100mm																																									
LED Lamp	96PCS																																									
Motion sensor	No (customize is available)	<b>Packing:</b> <b>LED Lamp Packing Size:605*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:5.2KG</b> <b>Solar Panel Packing Size: 750*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:6.3KG</b> <b>Packs Containers:</b> <b>20GP:510Sets</b> <b>40GP:1035Sets</b> <b>40HP:1235Sets</b>																																								
Remote Control	Yes (1pc remote control per lot)																																									
Waterproof	IP65																																									
Working Temperature	-25°C to 65°C																																									
Certificates	CE、ROHS、IP65																																									
Warranty	3Years																																									

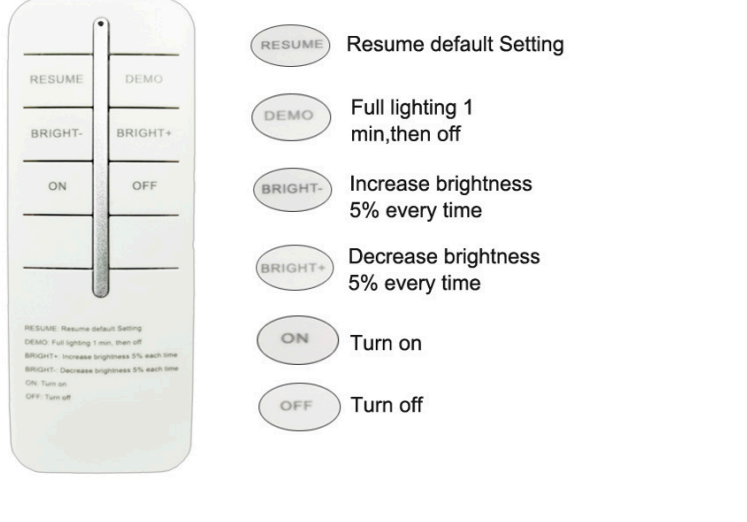

SX-ZC-50W		Feature: 1. Whole lamp adopt high-end aluminum alloy material. 2. LED module adjustable angle, suitable for different terrain roads. 3. Super-big battery box, the battery inside led lamp. 4. View angle is 140°, lighting more area. 5. Very easy install, maintenance, disassembly takes only three minutes, auto on/off. 6. With remote control, use UAV technology, can penetrate walls, remote control distance up to 30 meters.	EXW	124.6																
		<table border="1"> <tr> <th>LED</th> <th>Bridgelux chips3030 (Life time 100000hours)</th> <th>Lighting Mode</th> </tr> <tr> <td>Lumen(LM)</td> <td>150LM/W</td> <td>3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness</td> </tr> </table>			LED	Bridgelux chips3030 (Life time 100000hours)	Lighting Mode	Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness										
		LED			Bridgelux chips3030 (Life time 100000hours)	Lighting Mode														
	Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness																	
	<table border="1"> <tr> <td>Colour Temperature</td> <td>6000K ~6500K (it can be customized)</td> <td rowspan="7">  </td> </tr> <tr> <td>LifePO4 Battery</td> <td>30AH 12.8V</td> </tr> <tr> <td>Solar Panel</td> <td>18V65W Imported High Efficiency Monocrystalline Silicon</td> </tr> <tr> <td>Install Pole diameter</td> <td>60-65mm</td> </tr> <tr> <td>Mounting Height</td> <td>6~8m (Suggest install between space20-30m)</td> </tr> <tr> <td>Solar Charging Time</td> <td>5-6 hours by bright sunlight</td> </tr> <tr> <td>Cloudy/Rainy days</td> <td>5 -7Cloudy/Rainy days</td> </tr> </table>	Colour Temperature	6000K ~6500K (it can be customized)		LifePO4 Battery	30AH 12.8V	Solar Panel	18V65W Imported High Efficiency Monocrystalline Silicon	Install Pole diameter	60-65mm	Mounting Height	6~8m (Suggest install between space20-30m)	Solar Charging Time	5-6 hours by bright sunlight	Cloudy/Rainy days	5 -7Cloudy/Rainy days				
	Colour Temperature	6000K ~6500K (it can be customized)																		
	LifePO4 Battery	30AH 12.8V																		
	Solar Panel	18V65W Imported High Efficiency Monocrystalline Silicon																		
	Install Pole diameter	60-65mm																		
	Mounting Height	6~8m (Suggest install between space20-30m)																		
Solar Charging Time	5-6 hours by bright sunlight																			
Cloudy/Rainy days	5 -7Cloudy/Rainy days																			
<table border="1"> <tr> <td>Material</td> <td>High Class Aluminum</td> <td rowspan="10"> <b>Packing:</b>  <b>LED Lamp Packing Size:695*300*115MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:6KG</b>  <b>Solar Panel Packing Size: 820*580*80MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:7.2KG</b>  <b>Packs Containers:</b>  <b>20GP:450Sets</b>  <b>40GP:920Sets</b>  <b>40HP:1100Sets</b> </td> </tr> <tr> <td>Product Size</td> <td>665*280*100mm</td> </tr> <tr> <td>LED Lamp</td> <td>144PCS</td> </tr> <tr> <td>Motion sensor</td> <td>No (customize is available)</td> </tr> <tr> <td>Remote Control</td> <td>Yes (1pc remote control per lot)</td> </tr> <tr> <td>Waterproof</td> <td>IP65</td> </tr> <tr> <td>Working Temperature</td> <td>-25°C to 65°C</td> </tr> <tr> <td>Certificates</td> <td>CE、ROHS、IP65</td> </tr> <tr> <td>Warranty</td> <td>3Years</td> </tr> </table>	Material	High Class Aluminum	<b>Packing:</b> <b>LED Lamp Packing Size:695*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:6KG</b> <b>Solar Panel Packing Size: 820*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:7.2KG</b> <b>Packs Containers:</b> <b>20GP:450Sets</b> <b>40GP:920Sets</b> <b>40HP:1100Sets</b>	Product Size	665*280*100mm	LED Lamp	144PCS	Motion sensor	No (customize is available)	Remote Control	Yes (1pc remote control per lot)	Waterproof	IP65	Working Temperature	-25°C to 65°C	Certificates	CE、ROHS、IP65	Warranty	3Years	
Material	High Class Aluminum	<b>Packing:</b> <b>LED Lamp Packing Size:695*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:6KG</b> <b>Solar Panel Packing Size: 820*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:7.2KG</b> <b>Packs Containers:</b> <b>20GP:450Sets</b> <b>40GP:920Sets</b> <b>40HP:1100Sets</b>																		
Product Size	665*280*100mm																			
LED Lamp	144PCS																			
Motion sensor	No (customize is available)																			
Remote Control	Yes (1pc remote control per lot)																			
Waterproof	IP65																			
Working Temperature	-25°C to 65°C																			
Certificates	CE、ROHS、IP65																			
Warranty	3Years																			
SX-ZC-60W			Feature: 1. Whole lamp adopt high-end aluminum alloy material. 2. LED module adjustable angle, suitable for different terrain roads. 3. Super-big battery box, the battery inside led lamp. 4. View angle is 140°, lighting more area. 5. Very easy install, maintenance, disassembly takes only three minutes, auto on/off. 6. With remote control, use UAV technology, can penetrate walls, remote control distance up to 30 meters.	EXW	142.3															
		<table border="1"> <tr> <th>LED</th> <th>Bridgelux chips3030 (Life time 100000hours)</th> <th>Lighting Mode</th> </tr> <tr> <td>Lumen(LM)</td> <td>150LM/W</td> <td>3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness</td> </tr> </table>	LED			Bridgelux chips3030 (Life time 100000hours)	Lighting Mode	Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness										
		LED	Bridgelux chips3030 (Life time 100000hours)			Lighting Mode														
	Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness																	
	<table border="1"> <tr> <td>Colour Temperature</td> <td>6000K ~6500K (it can be customized)</td> <td rowspan="7">  </td> </tr> <tr> <td>LifePO4 Battery</td> <td>36AH 12.8V</td> </tr> <tr> <td>Solar Panel</td> <td>18V80W Imported High Efficiency Monocrystalline Silicon</td> </tr> <tr> <td>Install Pole diameter</td> <td>60-65mm</td> </tr> <tr> <td>Mounting Height</td> <td>7~9m (Suggest install between space20-30m)</td> </tr> <tr> <td>Solar Charging Time</td> <td>5-6 hours by bright sunlight</td> </tr> <tr> <td>Cloudy/Rainy days</td> <td>5 -7Cloudy/Rainy days</td> </tr> </table>	Colour Temperature	6000K ~6500K (it can be customized)		LifePO4 Battery	36AH 12.8V	Solar Panel	18V80W Imported High Efficiency Monocrystalline Silicon	Install Pole diameter	60-65mm	Mounting Height	7~9m (Suggest install between space20-30m)	Solar Charging Time	5-6 hours by bright sunlight	Cloudy/Rainy days	5 -7Cloudy/Rainy days				
	Colour Temperature	6000K ~6500K (it can be customized)																		
	LifePO4 Battery	36AH 12.8V																		
	Solar Panel	18V80W Imported High Efficiency Monocrystalline Silicon																		
	Install Pole diameter	60-65mm																		
	Mounting Height	7~9m (Suggest install between space20-30m)																		
Solar Charging Time	5-6 hours by bright sunlight																			
Cloudy/Rainy days	5 -7Cloudy/Rainy days																			
<table border="1"> <tr> <td>Material</td> <td>High Class Aluminum</td> <td rowspan="10"> <b>Packing:</b>  <b>LED Lamp Packing Size:695*300*115MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:6.6KG</b>  <b>Solar Panel Packing Size: 1090*580*80MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:9KG</b>  <b>Packs Containers:</b>  <b>20GP:375Sets</b>  <b>40GP:760Sets</b>  <b>40HP:905Sets</b> </td> </tr> <tr> <td>Product Size</td> <td>665*280*100mm</td> </tr> <tr> <td>LED Lamp</td> <td>144PCS</td> </tr> <tr> <td>Motion sensor</td> <td>No (customize is available)</td> </tr> <tr> <td>Remote Control</td> <td>Yes (1pc remote control per lot)</td> </tr> <tr> <td>Waterproof</td> <td>IP65</td> </tr> <tr> <td>Working Temperature</td> <td>-25°C to 65°C</td> </tr> <tr> <td>Certificates</td> <td>CE、ROHS、IP65</td> </tr> <tr> <td>Warranty</td> <td>3Years</td> </tr> </table>	Material	High Class Aluminum	<b>Packing:</b> <b>LED Lamp Packing Size:695*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:6.6KG</b> <b>Solar Panel Packing Size: 1090*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:9KG</b> <b>Packs Containers:</b> <b>20GP:375Sets</b> <b>40GP:760Sets</b> <b>40HP:905Sets</b>	Product Size	665*280*100mm	LED Lamp	144PCS	Motion sensor	No (customize is available)	Remote Control	Yes (1pc remote control per lot)	Waterproof	IP65	Working Temperature	-25°C to 65°C	Certificates	CE、ROHS、IP65	Warranty	3Years	
Material	High Class Aluminum	<b>Packing:</b> <b>LED Lamp Packing Size:695*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:6.6KG</b> <b>Solar Panel Packing Size: 1090*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:9KG</b> <b>Packs Containers:</b> <b>20GP:375Sets</b> <b>40GP:760Sets</b> <b>40HP:905Sets</b>																		
Product Size	665*280*100mm																			
LED Lamp	144PCS																			
Motion sensor	No (customize is available)																			
Remote Control	Yes (1pc remote control per lot)																			
Waterproof	IP65																			
Working Temperature	-25°C to 65°C																			
Certificates	CE、ROHS、IP65																			
Warranty	3Years																			
SX-ZC-80W			Feature: 1. Whole lamp adopt high-end aluminum alloy material. 2. LED module adjustable angle, suitable for different terrain roads. 3. Super-big battery box, the battery inside led lamp. 4. View angle is 140°, lighting more area. 5. Very easy install, maintenance, disassembly takes only three minutes, auto on/off. 6. With remote control, use UAV technology, can penetrate walls, remote control distance up to 30 meters.	EXW	164.6															
		<table border="1"> <tr> <th>LED</th> <th>Bridgelux chips3030 (Life time 100000hours)</th> <th>Lighting Mode</th> </tr> <tr> <td>Lumen(LM)</td> <td>150LM/W</td> <td>3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness</td> </tr> </table>	LED			Bridgelux chips3030 (Life time 100000hours)	Lighting Mode	Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness										
		LED	Bridgelux chips3030 (Life time 100000hours)			Lighting Mode														
	Lumen(LM)	150LM/W	3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness																	
	<table border="1"> <tr> <td>Colour Temperature</td> <td>6000K ~6500K (it can be customized)</td> <td rowspan="7">  </td> </tr> <tr> <td>LifePO4 Battery</td> <td>42AH 12.8V</td> </tr> <tr> <td>Solar Panel</td> <td>18V100W Imported High Efficiency Monocrystalline Silicon</td> </tr> <tr> <td>Install Pole diameter</td> <td>60-65mm</td> </tr> <tr> <td>Mounting Height</td> <td>8~10m (Suggest install between space25-35m)</td> </tr> </table>	Colour Temperature	6000K ~6500K (it can be customized)		LifePO4 Battery	42AH 12.8V	Solar Panel	18V100W Imported High Efficiency Monocrystalline Silicon	Install Pole diameter	60-65mm	Mounting Height	8~10m (Suggest install between space25-35m)								
	Colour Temperature	6000K ~6500K (it can be customized)																		
	LifePO4 Battery	42AH 12.8V																		
	Solar Panel	18V100W Imported High Efficiency Monocrystalline Silicon																		
	Install Pole diameter	60-65mm																		
	Mounting Height	8~10m (Suggest install between space25-35m)																		
<table border="1"> <tr> <td>Material</td> <td>High Class Aluminum</td> <td rowspan="10"> <b>Packing:</b>  <b>LED Lamp Packing Size:695*300*115MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:6.6KG</b>  <b>Solar Panel Packing Size: 1090*580*80MM</b>  <b>Q'ty/ctn:1Set</b>  <b>G.W:9KG</b>  <b>Packs Containers:</b>  <b>20GP:375Sets</b>  <b>40GP:760Sets</b>  <b>40HP:905Sets</b> </td> </tr> <tr> <td>Product Size</td> <td>665*280*100mm</td> </tr> <tr> <td>LED Lamp</td> <td>144PCS</td> </tr> <tr> <td>Motion sensor</td> <td>No (customize is available)</td> </tr> <tr> <td>Remote Control</td> <td>Yes (1pc remote control per lot)</td> </tr> <tr> <td>Waterproof</td> <td>IP65</td> </tr> <tr> <td>Working Temperature</td> <td>-25°C to 65°C</td> </tr> <tr> <td>Certificates</td> <td>CE、ROHS、IP65</td> </tr> <tr> <td>Warranty</td> <td>3Years</td> </tr> </table>	Material	High Class Aluminum			<b>Packing:</b> <b>LED Lamp Packing Size:695*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:6.6KG</b> <b>Solar Panel Packing Size: 1090*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:9KG</b> <b>Packs Containers:</b> <b>20GP:375Sets</b> <b>40GP:760Sets</b> <b>40HP:905Sets</b>	Product Size	665*280*100mm	LED Lamp	144PCS	Motion sensor	No (customize is available)	Remote Control	Yes (1pc remote control per lot)	Waterproof	IP65	Working Temperature	-25°C to 65°C	Certificates	CE、ROHS、IP65	Warranty
Material	High Class Aluminum	<b>Packing:</b> <b>LED Lamp Packing Size:695*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:6.6KG</b> <b>Solar Panel Packing Size: 1090*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:9KG</b> <b>Packs Containers:</b> <b>20GP:375Sets</b> <b>40GP:760Sets</b> <b>40HP:905Sets</b>																		
Product Size	665*280*100mm																			
LED Lamp	144PCS																			
Motion sensor	No (customize is available)																			
Remote Control	Yes (1pc remote control per lot)																			
Waterproof	IP65																			
Working Temperature	-25°C to 65°C																			
Certificates	CE、ROHS、IP65																			
Warranty	3Years																			



	Solar Charging Time	5-6 hurs by bright sunlight		<b>Packing:</b> <b>LED Lamp Packing Size:785*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:7.5KG</b> <b>Solar Panel Packing Size: 1290*580*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:11KG</b> <b>Packs Containers:</b> <b>20GP:320Sets</b> <b>40GP:655Sets</b> <b>40HP:780Sets</b>
	<b>Cloudy/Rainy days</b>	<b>5 -7Cloudy/Rainy days</b>		
	Material	High Class Aluminum		
	Product Size	755*280*100mm		
	LED Lamp	192PCS		
	Motion sensor	No (customize is available)		
	Remote Control	Yes (1pc remote control per lot)		
	Waterproof	IP65		
	Working Tempreture	-25°C to 65°C		
	Certificates	CE、ROHS、IP65		
Warranty	3Years			
<b>Feature:</b> 1.Whole lamp adopt high-end aluminum alloy material. 2.LED module adjustable angle,suitable for different terrain roads. 3.Super-big battery box,the battery inside led lamp. 4.View angle is 140°, lighting more area. 5.Very easy install,maintaince,disassembly takes only three minutes, auto on/off. 6.With remote control,use UAV technology,can penetrate walls, remote control distance up to 30 meters.			<b>EXW</b>	<b>203.8</b>
<b>LED</b>	<b>Bridgelux chips3030 (Life time 100000hours)</b>	<b>Lighting Mode</b>		
Lumen(LM)	150LM/W	<b>3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness</b>		
Colour Tempreture	6000K ~6500K (it can be customized)			
LifePO4 Battery	54AH 12.8V			
Solar Panel	18V130W Imported High Efficiency Monocrystalline Silicon			
Install Pole diameter	60-65mm			
Mounting Height	9~12m (Suggest install between space30-40m)			
Solar Charging Time	5-6 hurs by bright sunlight			
<b>Cloudy/Rainy days</b>	<b>5 -7Cloudy/Rainy days</b>			
Material	High Class Aluminum	<b>Packing:</b> <b>LED Lamp Packing Size:875*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:9KG</b> <b>Solar Panel Packing Size: 1130*730*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:13.2KG</b> <b>Packs Containers:</b> <b>20GP:290Sets</b> <b>40GP:595Sets</b> <b>40HP:710Sets</b>		
Product Size	845*280*100mm			
LED Lamp	240PCS			
Motion sensor	No (customize is available)			
Remote Control	Yes (1pc remote control per lot)			
Waterproof	IP65			
Working Tempreture	-25°C to 65°C			
Certificates	CE、ROHS、IP65			
Warranty	3Years			
<b>Feature:</b> 1.Whole lamp adopt high-end aluminum alloy material. 2.LED module adjustable angle,suitable for different terrain roads. 3.Super-big battery box,the battery inside led lamp. 4.View angle is 140°, lighting more area. 5.Very easy install,maintaince,disassembly takes only three minutes, auto on/off. 6.With remote control,use UAV technology,can penetrate walls, remote control distance up to 30 meters.			<b>EXW</b>	<b>230.7</b>
<b>LED</b>	<b>Bridgelux chips3030 (Life time 100000hours)</b>	<b>Lighting Mode</b>		
Lumen(LM)	150LM/W	<b>3hrs 100% brightness+2hrs 80% brightness+7 hrs 25% brightness</b>		
Colour Tempreture	6000K ~6500K (it can be customized)			
LifePO4 Battery	60AH 12.8V			
Solar Panel	18V170W Imported High Efficiency Monocrystalline Silicon			
Install Pole diameter	60-65mm			
Mounting Height	10~12m (Suggest install between space30-40m)			
Solar Charging Time	5-6 hours by bright sunlight			
<b>Cloudy/Rainy days</b>	<b>5 -7Cloudy/Rainy days</b>			
Material	High Class Aluminum	<b>Packing:</b> <b>LED Lamp Packing Size:875*300*115MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:9.6KG</b> <b>Solar Panel Packing Size: 1490*730*80MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:15.8KG</b> <b>Packs Containers:</b> <b>20GP:240Sets</b> <b>40GP:490Sets</b> <b>40HP:580Sets</b>		
Product Size	845*280*100mm			
LED Lamp	240PCS			
Motion sensor	No (customize is available)			
Remote Control	Yes (1pc remote control per lot)			
Waterproof	IP65			
Working Tempreture	-25°C to 65°C			
Certificates	CE、ROHS、IP65			
Warranty	3Years			

**Remark:**

- Price in this offer are based on EXW price, not including lamp pole,solar panel bracket, shipping costs, tax and duties(10 points plus tax)
- Payment terms:30% deposit before production,70% balance payment before delivery.
- Warranty:3 years,during the warranty period, we will repair or replace parts damaged due to quality reasons for free.

4.Quotation validity: 10 days. The specifications and price are subject to the final contract.  
5.Special configuration and special designs price calculation extra.

Contact: Mr.ZHAO

Tel/WhatsApp/Wechat: +8618888070088

Email: [xinyao16@sxjgzm.com](mailto:xinyao16@sxjgzm.com)